 Specifications and technical data are subject to change without notice.
Please contact us to confirm relevant information on ordering.



MODULAR TERMINAL

Copy right reserved EBS, NO.2016001



Shanghai Ebasee Electric Co., Ltd

Add:No.18, Gutang Rd,Shanghai 201209, China
Tel: +86 21 5032 0898
Fax: +86 21 5032 0828
[http:// www.ebasee.com](http://www.ebasee.com)



APP

Ebasee
Smart Living Green Ebasee
Ebasee Ltd.,China

Company Profile

As a leading supplier in the low voltage electrics industry, Shanghai Ebasee Electric Co., Ltd. products have been used for residential, commercial and industrial applications with its quality and service. EBASEE brand is recognized for its quality and reliability in an ever-increasing number of markets worldwide. So far EBASEE products have gained many international approvals, such as **TUV, KEMA, CB, SEMKO, RoHS, CE, and CCC** etc.

With quality raw materials and components supply, all products are manufactured to EBASEE's defined specifications. We have 4 semi-auto production lines, up to date quality control facilities, and well-trained skillful workers. Moreover, with a technical R & D team and fully equipped in-house laboratory, EBASEE factory can carry out efficient new products developing and daily production QC as well.

EBASEE have wide range cooperations with world leading companies in new products developing or OEM, ODM cooperation. Meanwhile we also process industry cooperation on intelligent home products, and work with some university such as Xi'an Jiao Tong University on project solutions. EBASEE is focused on achieving growth through the growth and success of its worldwide partners.

EBASEE, guided by the "market-oriented" philosophy, powered with the "Quick response and flexible supply" capability, can support our worldwide partners to compete against established global players to deliver the most comprehensive and cost-effective products and service in the market.

"Smart life, Green EBASEE"



Enterprise credit



eBS9B Miniature Circuit Breaker




Function

- Short-circuit, Over-load and Isolation
- High short-circuit breaking capacity
- ON/ OFF status Indicator
- Double wiring terminals could be connected cable, U type and needle type busbar
- Easy installation and hanging on 35mm Din rail



Nomenclature

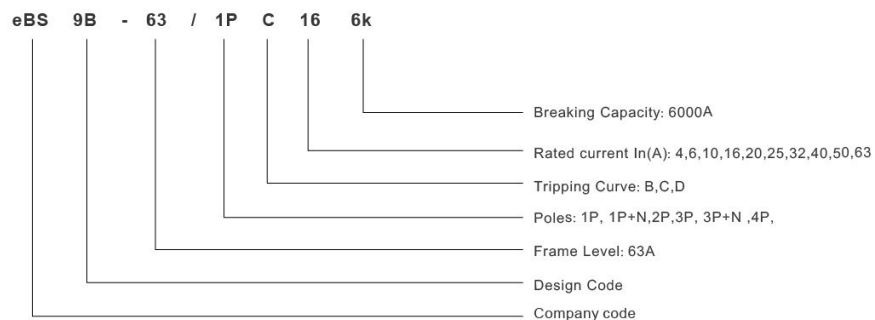


Connection capacity	Flexible conductor 35mm ²	Rigid conductor 25mm ²
Fastening torque	2.0Nm	
Installation	On symmetrical DIN rail 35mm	Panel mounting

Technical Parameter

Standard	IEC60898
Poles	1P, 1P+N, 2P, 3P, 3P+N, 4P,
Rated current In(A)	4, 6, 10, 16, 20, 25, 32, 40, 50, 63A
Rated voltage Un(V)	1P: 240/415V AC 50/60Hz 1P+N: 240V AC 50/60Hz 2P, 3P, 3P+N, 4P: 415V AC 50/60Hz
Rated voltage	B, C, D
Breaking capacity Icn(A)	6000A
Protection level	IP20
Environment temperature	-5°C to +40°C
Installation	On symmetrical DIN rail 35mm

Dimensions

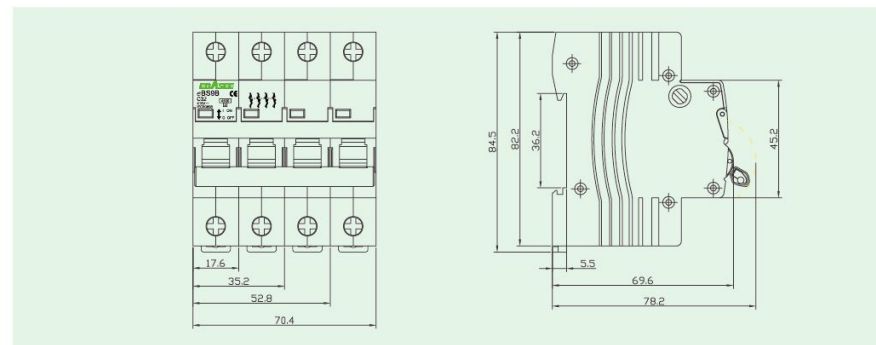

Order Note

Following items should be marked when ordering	Ordering sample
Product name and model	To order eBS9B-63 Miniature circuit breaker, 2 Poles, curve C, rated current 20A, quantity is 100 pieces, should be marked :
Frame level	eBS9B-63/2PC20 100PCS.
Poles	
Curve characteristic, rated current	
Quantity	