



VT7R

Residual Current Circuit Breaker

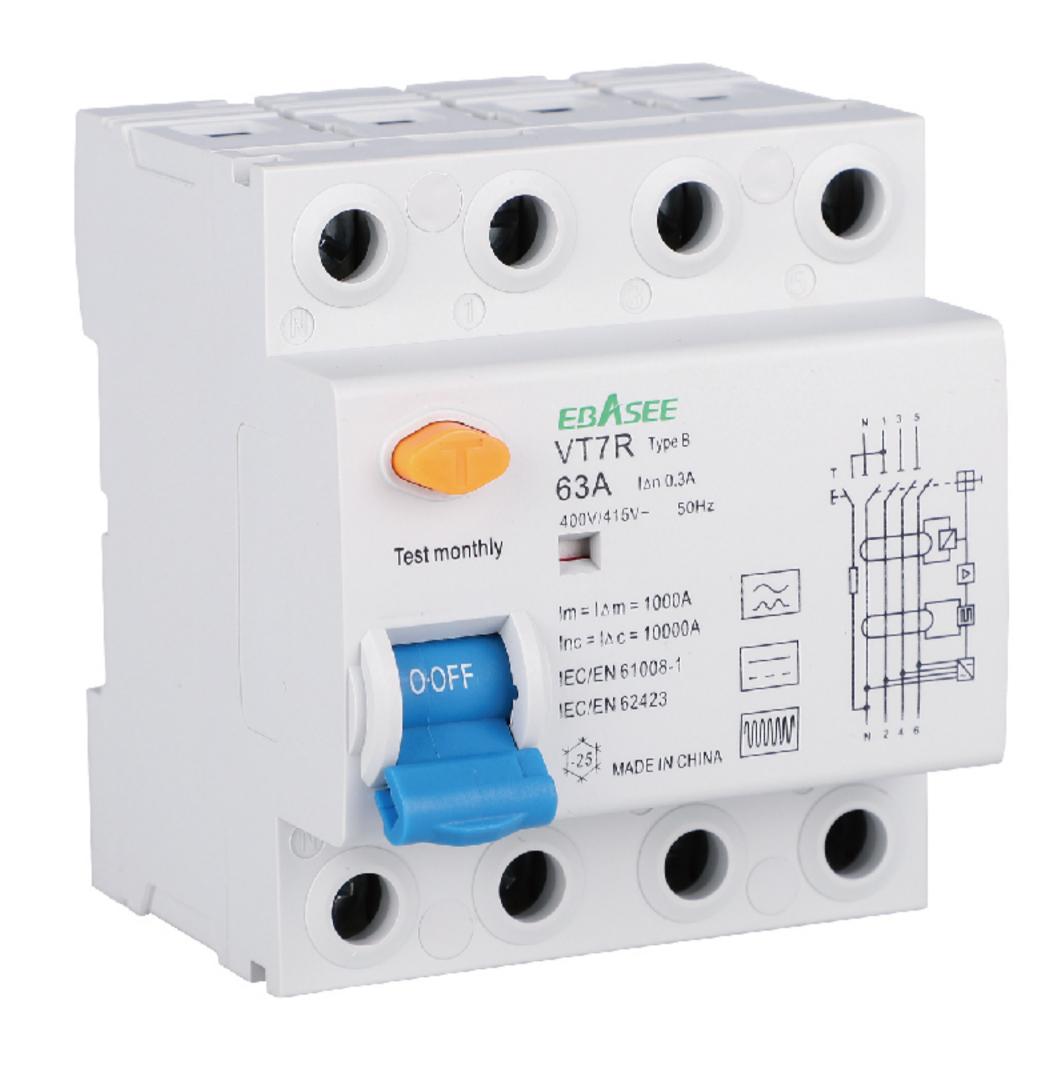

Nomenclature

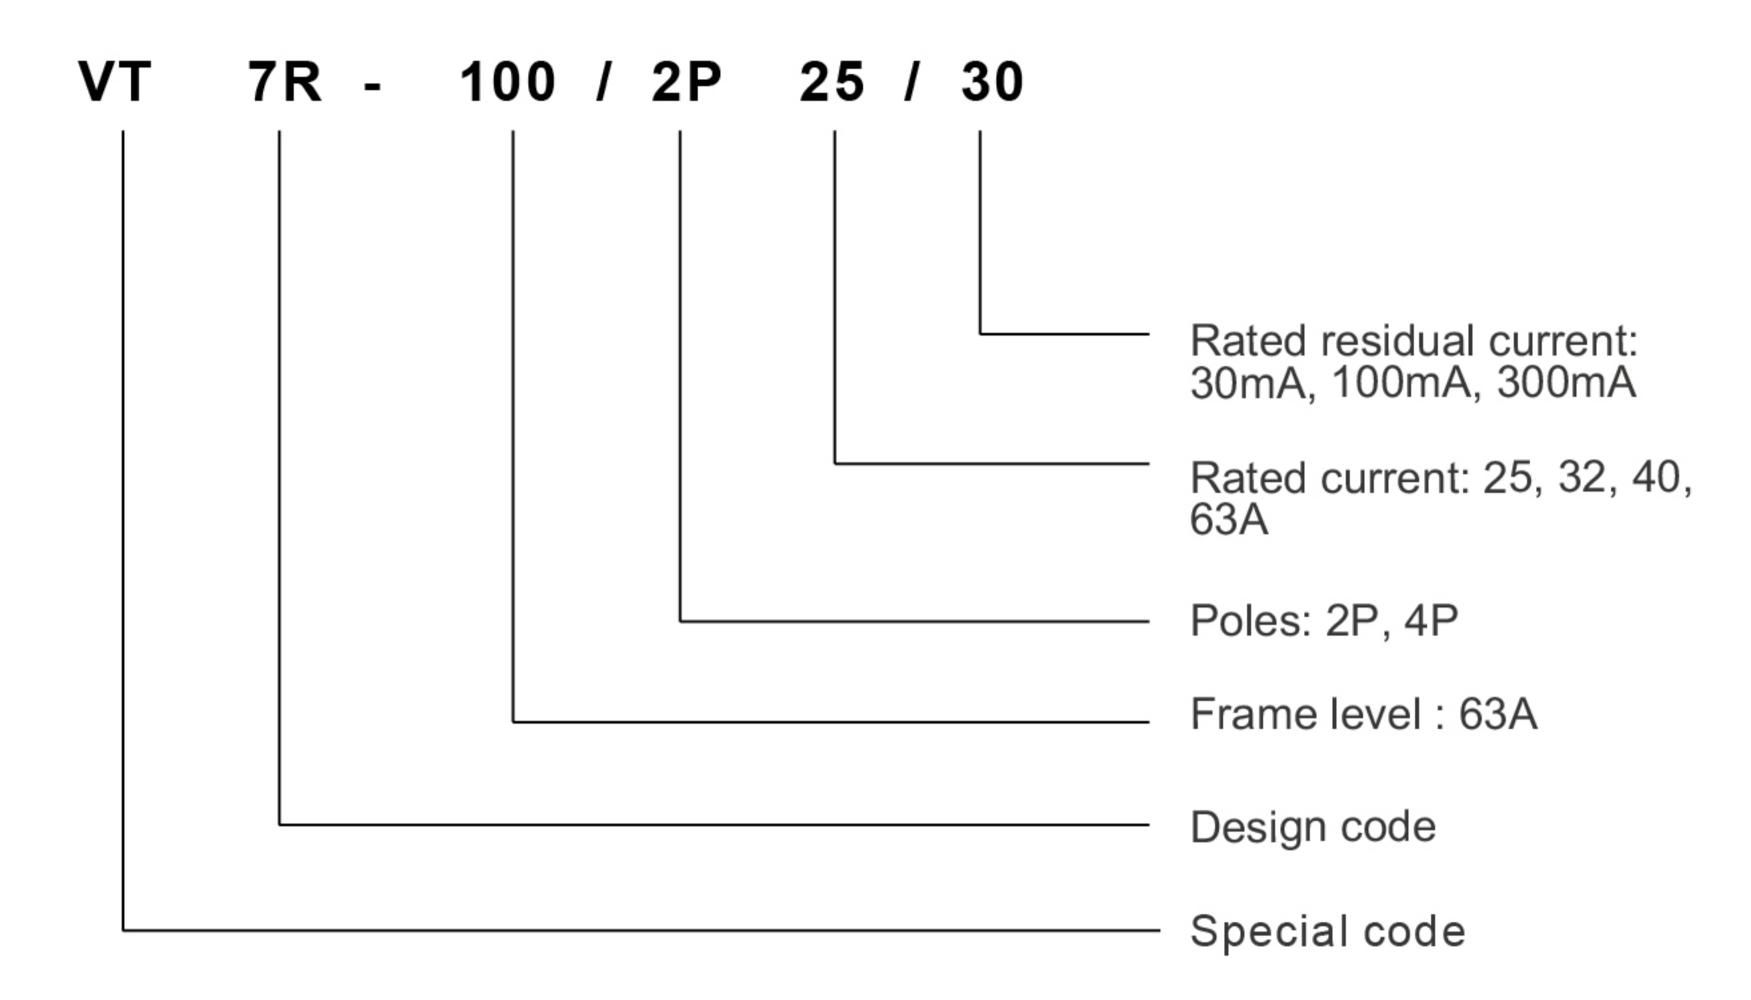


Function

- Provides protection against earth fault/leakage current and unction of isolation
- High short-circuit current withstand capacity
- Applicable to terminal and pin/U type busbar connection
- On off display function of contact position
- ☐ Fire resistant plastic parts endures abnormal heating and strong impact
- ☐ Automatically disconnect the circuit when earth fault/leakage current occurs and exceeds the rated sensitivity

Technical Parameter

| Standard | IEC61008 |
|--|-------------------------------------|
| Poles | 2P, 4P |
| Rated current In(A) | 25, 32, 40, 63A |
| Rated voltage Un (V) | 2P: 230V~ 50/60Hz 4P: 400V~ 50/60Hz |
| Rated conditional short-circuit current lcn(A) | 6000A |
| Rated residual operating current I△n(mA) | 30,100,300 |
| Rated residual non operating current l△no | 0.5I△n~I△n |
| Action time | instantaneous type ≤0.1S |
| Protection grade | IP20 |
| Ambient temperature | -5℃~+40℃ |
| Installation | DIN rail 35mm, panel mounting |

Dimensions

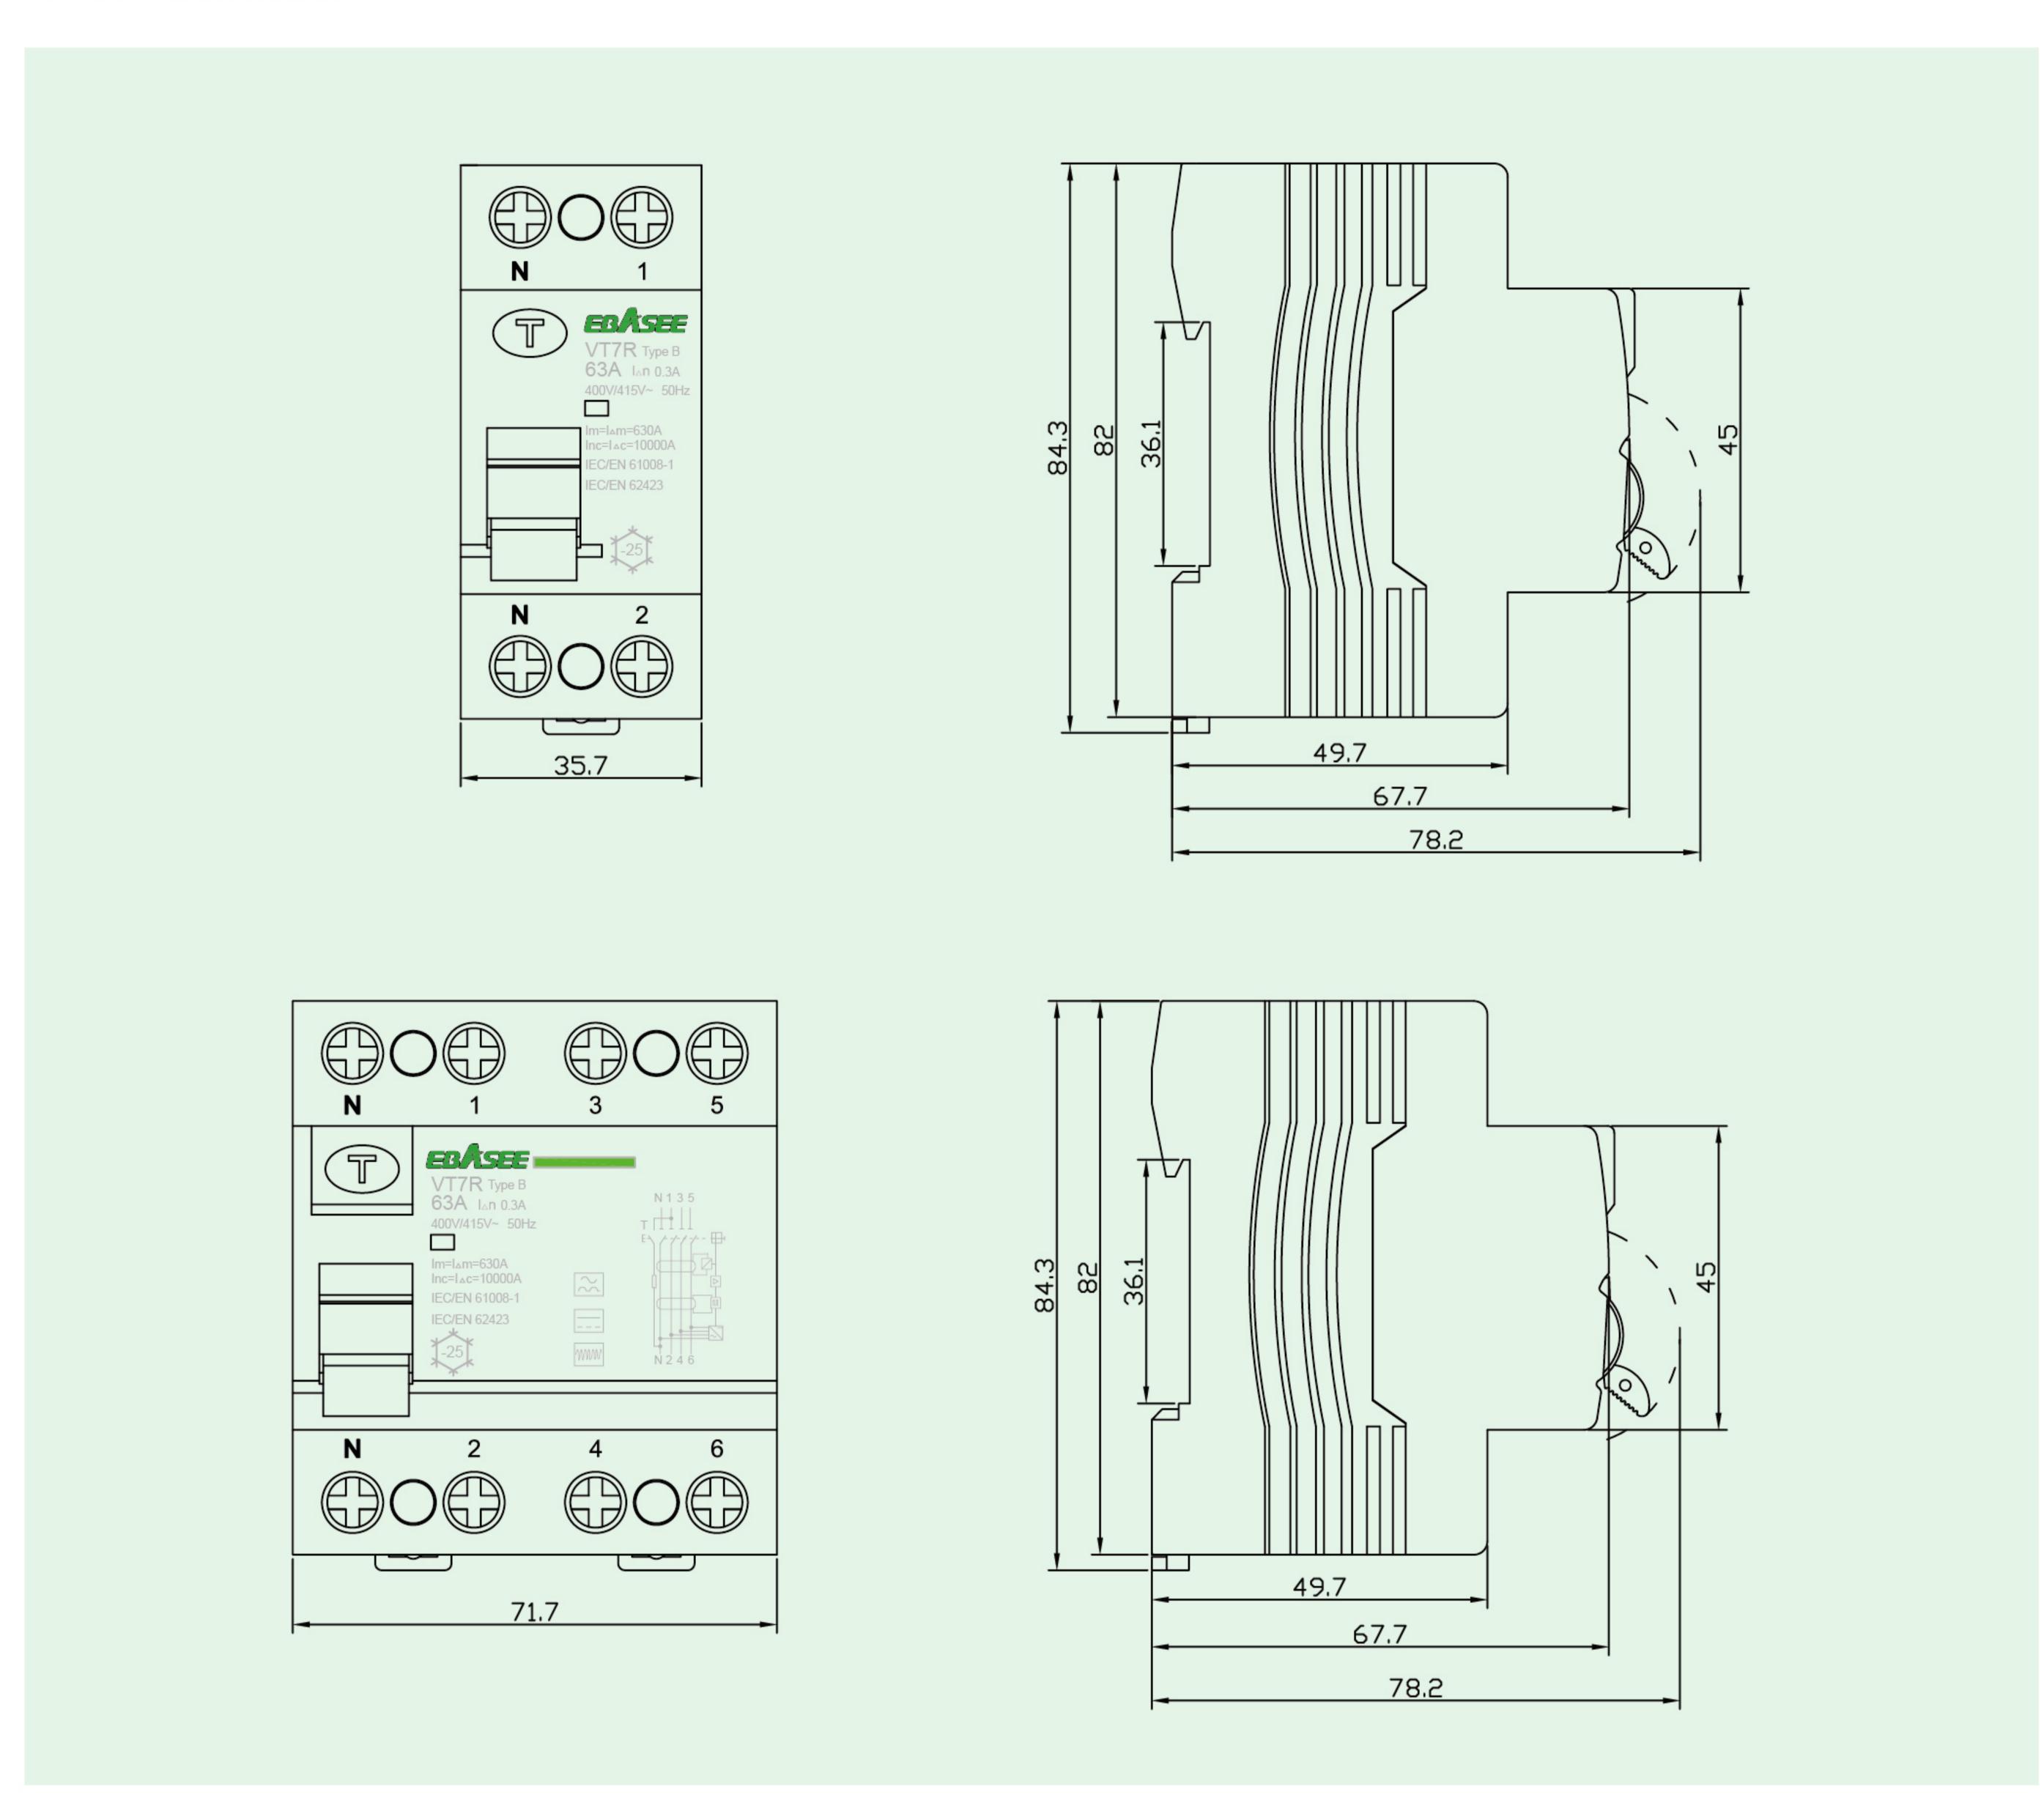

Order Note

| Following items should be marked when ordering | Ordering sample |
|--|---|
| Product name and model | To order VT7R residual current circuit breaker, frame level 63A, 2P, |
| Frame level | rated current 25A, rated residual current is 30mA, quantity 100 pieces, |
| Poles | should be marked: |
| Tripping characteristic and rated current | RCCB VT7R/2P 25/30, 100PCS. |
| Rated residual current | |
| Quantity | |

001 www.ebasee.com